

Anti-Freeze Instructions for BBW Brendon Bowserwashers

STEP1

Fill the anti-freeze tank with 10Ltrs of diluted anti-freeze mixture - (50% strength will be sufficient)




CAUTION: Anti-freeze is a dangerous chemical and should be handled with care. Refer to the COSHH Regulations.



STEP2

With the machine switched off, safely release the residual pressure in the gun and disconnect it from the high pressure hose.

Make sure the hose is re-wound, secured and not pointed at any person or animal.

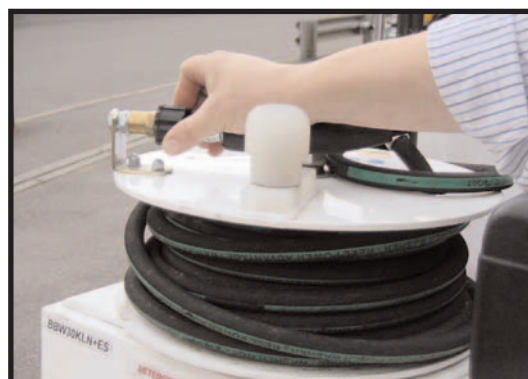

STEP3

Position the red handle of the anti-freeze diverter valve to the 12 o'clock position. **IMPORTANT:** Make sure this valve is fully in the upright position.

Start the pump and allow engine to run until the anti-freeze mixture is seen. Switch off the machine and return red lever to the horizontal position.

Your machine is now protected from expensive frost damage.



STEP4

Once the risk of frost has cleared the anti-freeze mixture should be pumped back into the tank before the powerwasher is used again.

To reclaim the anti-freeze mixture unscrew the lid on the anti-freeze tank, place the outlet of the high pressure hose back into this tank, make sure the red handle of the anti-freeze diverter valve is in the horizontal position and run the machine until all the mixture has been purged from the pump (runs clear), then switch off the machine and connect the gun for normal use.

